

GSE0520Q

Ultra-low Capacitance Bidirectional Micro Packaged TVS Diodes for ESD Protection

Product Description

The GSE0520Q is designed to protect sensitive electronics from damage or latch up due to ESD, lightning, and other voltage induced transient events.

The DFN1006 package type is provided for easy PCB layout.


Features

- Max. peak pulse power : $P_{PP}=20W$ at $t_P=8/20\mu s$
- Stand-off Voltage : 5.0V
- Low capacitance ($<0.5pF$) for high-speed interfaces
- No insertion loss to 3.0GHz
- Replacement for MLV
- Protects I/O Port
- Low Clamping Voltage
- Low Leakage
- Solid-state Punch-Through TVS Process technology
- IEC61000-4-2(ESD) $\pm 15kV$ (air), $\pm 8kV$ (contact)
- Meets MSL 1 Requirements
- RoHS Compliant, 100%Pb & Halogen Free

Applications


- High Speed Line : USB1.0/2.0, VGA, DVI, SDI
- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals

Packages & Pin Assignments




DFN1006

Marking & Orientation



Part Number	Package	Marking
GSE0520QFF	DFN1006	S

Ordering Information

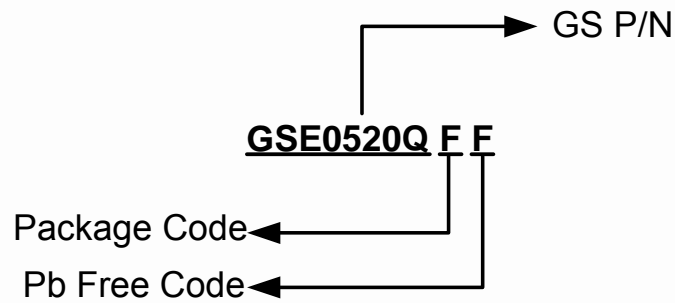

Part Number	Package	Quantity
GSE0520QFF	DFN1006	10000 PCS

Absolute Maximum Ratings

(T_A=25°C Unless otherwise noted)

Symbol	Parameter	Typical	Unit
P _{pk}	Peak Pulse Power (t _p =8/20μs)	20	W
V _{PP}	ESD Per IEC61000-4-2 (Air)	±15	kV
	ESD Per IEC61000-4-2 (Contact)	±8	kV
T _J	Operating Junction Temperature Range	-55 to +150	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C
T _L	Soldering Temperature, t(max)=10s	260	°C

Note : Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


Electrical Characteristics

(T_A=25°C Unless otherwise noted)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{RWM}	Reverse Stand-off Voltage	-			5.0	V
V _{BR}	Reverse Breakdown Voltage	I _R =1mA	6.0		10	V
R _{dyn}	Resistance	-		1.4		Ω
I _R	Reverse Leakage Current	V _{RWM} =5V			1.0	uA
V _C	Clamping Voltage	I _{PP} =1A (8/20μs)			15	V
C _J	Junction Capacitance	V _R =0V, f=1MHz		0.3	0.5	pF

Electrical Parameter


Symbol	Parameter
V_{RWM}	Working Peak Reverse Voltage
V_{PT}	Punch-Through Voltage @ I_{PT}
V_{SB}	Snap-Back Voltage @ I_{SB}
V_C	Clamping Voltage @ I_{PP}
I_T	Test Current
I_{RM}	Leakage current at V_{RWM}
I_{PP}	Peak pulse current
C_O	Off-state Capacitance
C_J	Junction Capacitance

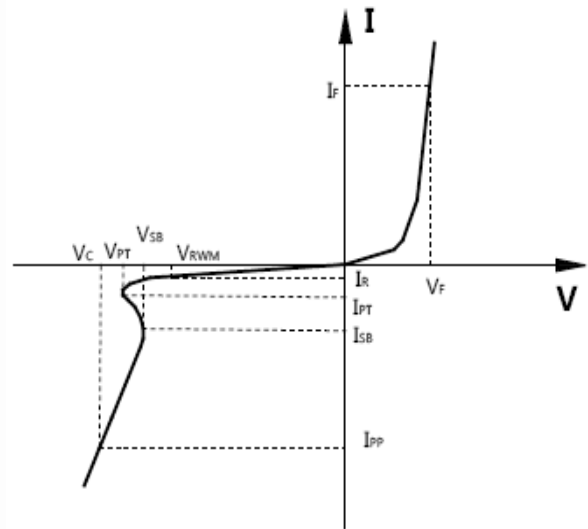


Typical Characteristics

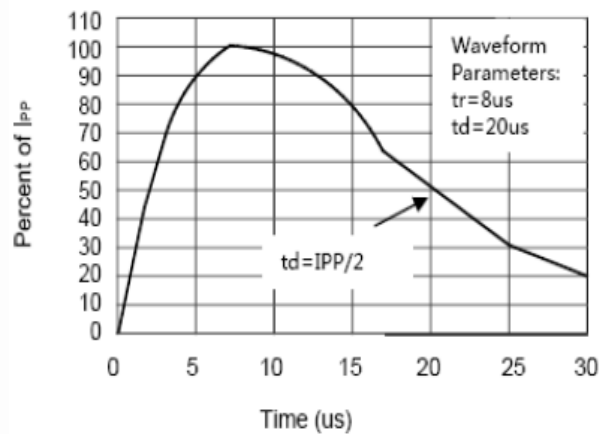

Pulse Waveform

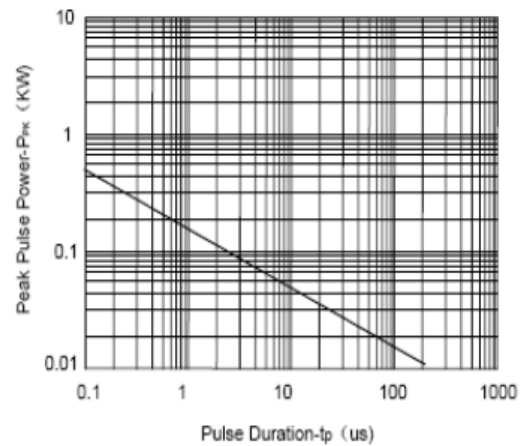


Non-Repetitive Peak Pulse Power vs. Pulse Time

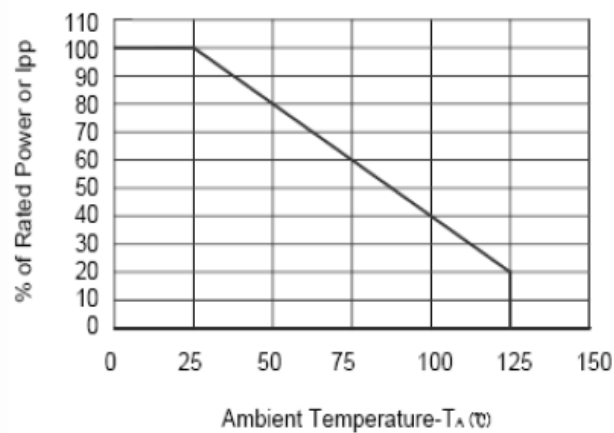

Power Derating Curve

Package Dimension

DFN1006

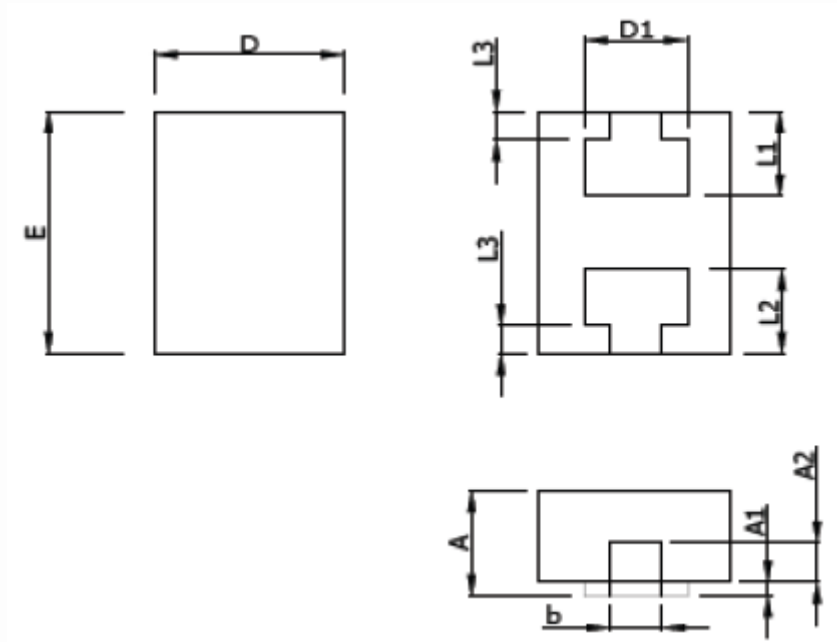








Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.30	0.40	0.012	0.016
A1	-	0.05	-	0.002
A2	0.125 (REF)		0.005 (REF)	
D	0.55	0.65	0.022	0.026
E	0.95	1.05	0.037	0.041
D1	0.45	0.55	0.018	0.021
b	0.15 (REF)		0.006 (REF)	
L1	0.25	0.35	0.010	0.014
L2	0.25	0.35	0.010	0.014
L3	0.05 (REF)		0.002 (REF)	



NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd NeiHu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

Shenzhen Branch(China)	
	1113 B Building, Happiness Washington, Baoan Nan Road, Luohu District, Shenzhen City, China
	0755-22208941
	sales_cn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587