

GS358SF

Dual Operational Amplifiers

Product Description

The GS358 consists of two independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages.

Operation from split power supplies is also possible and the low power supply current drains in independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, dc gain blocks and all the conventional op amp circuits, which now can be more easily implemented in single power supply systems. For example, the GS358 can be directly operated off of the standard +5V power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional $\pm 15V$ power supplies.


Features

- Wide range of supply voltages 3V to 32V
- Low supply current drain independent of supply
- Supply Current 0.5mA (TYP.)
- Low input biasing current
- Low input offset voltage and offset current
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- DC voltage gain: 100V/mV TYP.
- Internally frequency compensation
- RoHS Compliant, 100%Pb & Halogen Free
- ESD Protection(2KV) between V+/V- and GND


Applications

- Eliminates the need for dual supplies
- Compatible with all forms of logic
- Two internally compensated op amps
- Low power drains ideal for battery operation
- Allows direct sensing near GND
- VOUT can swing to GND

Functional Block Diagram

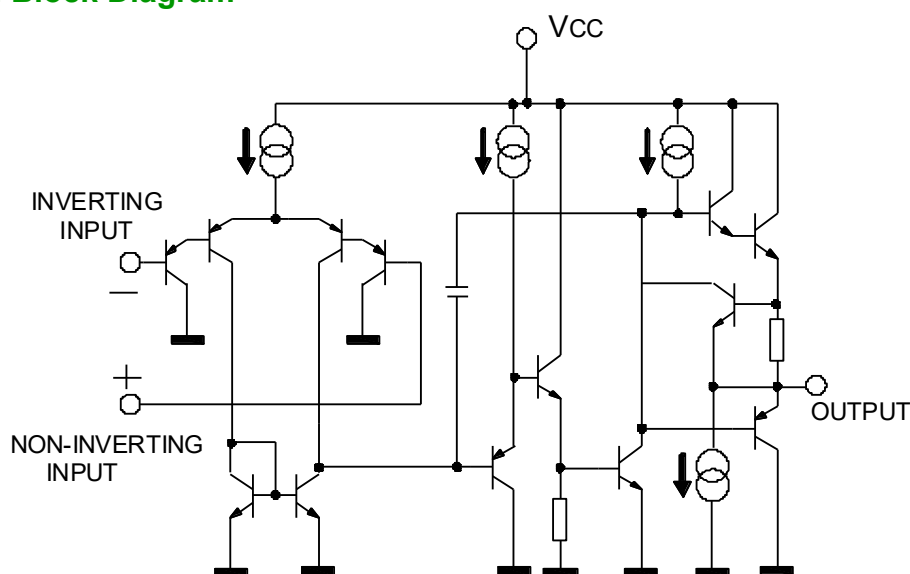

Packages & Pin Assignments

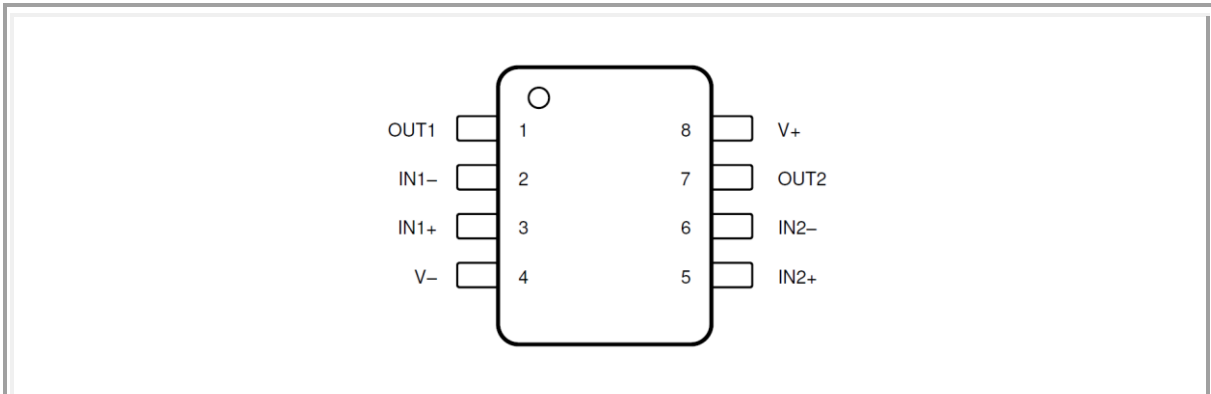


Pin	Pin Name	I/O	Description
1	1OUT	Output	Output 1
2	1IN-	Input	Negative input 1
3	1IN+	Input	Positive input 1
4	V-	—	Negative (lowest) supply or ground (for single-supply operation)
5	2IN+	Input	Positive input 2
6	2IN-	Input	Negative input 2
7	2OUT	Output	Output 2
8	V+	—	Positive (highest) supply

Ordering & Marking Information

Ordering Information			
Part Number	Package	Marking Code	Quantity/Reel
GS358SF	SOP-8	GS358S F□□□□	4,000 PCS

Marking Information

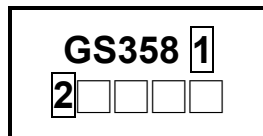

Product Code:
GS358

Package Code:
1 is S for SOP-8L

Green Level:
2 is F stands for RoHS
Compliant and Halogen Free

GS Code:
□ is GS Code.
□□□□

Absolute Maximum Ratings ^{1,2} (T_A=25°C, unless otherwise specified.)

Symbol	Parameter	Value	Unit	
V _{CC}	Single Supply	36	V	
V _{CC} , V _{EE}	Split Supply	±16	V	
V _{IDR}	Input Differential Voltage Range	±32	V	
I _{OS}	Output Short-circuit to GND	Continuous		
T _J	Junction Temperature	150	°C	
T _{STG}	Storage Temperature Range	-65 to +150	°C	
T _A	Operating Ambient Temperature Range	-40 to 85	°C	
θ _{JA}	Thermal Resistance (Junction to Ambient)	SOP-8	160	°C/W
θ _{JC}	Thermal Resistance (Junction to Case)	SOP-8	22	°C/W
ESD	ESD Rating (HBM)	2	KV	

Electrical Characteristics (at specified free-air temperature, $V_{CC}=5V$ (Unless Otherwise Noted))

Symbol	Parameter	Test Conditions*	Min	Typ	Max	Unit	
V_{IO}	Input offset voltage	$V_{CC}=5V$ to Max. $V_{IC}=V_{ICR}$ min, $V_o = 1.4V$	25°C		2	5	mV
			Full range			7	
αV_{IO}	Average temperature coefficient of input offset voltage		Full range		7		$\mu V/^\circ C$
I_{IO}	Input offset current	$V_o = 1.4V$	25°C		2	50	nA
			Full range			150	
αI_{IO}	Average temperature coefficient of input offset current		Full range		10		$pA/^\circ C$
I_{IB}	Input bias current	$V_o = 1.4V$	25°C		20	250	nA
			Full range			500	
V_{ICR}	Common-mode input voltage range	$V_{CC} = 5V$ to MAX	25°C	0 to $V_{CC}-1.5$			V
			Full range	0 to $V_{CC}-2$			
V_{OH}	High-level output voltage	$R_L = 2k\Omega$	25°C	$V_{CC}-1.5$			V
		$V_{CC} = MAX,$ $R_L = 2k\Omega$	Full range	26			
		$V_{CC} = MAX,$ $R_L = 10k\Omega$	Full range	27	28		
V_{OL}	Low-level output voltage	$R_L = 10k\Omega$	Full range		5	20	mV
A_{VD}	Large-signal differential voltage amplification	$V_{CC} = 15V$ $V_o=1V$ to 11V $R_L=2k\Omega$	25°C	25	100		V/mV
			Full range	15			
CMRR	Common-mode rejection ratio	$V_{CC} = 5V$ to MAX $V_{IC} = V_{ICR}$ min	25°C	65	80		dB
K_{SVR}	Supply voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	$V_{CC} = 5V$ to MAX	25°C	65	100		dB
V_{O1}/V_{O2}	Crosstalk attenuation	$f = 1k$ to 20k (Hz)	25°C		120		dB
I_o	Output current	$V_{CC} = 15V,$ $V_{ID} = 1V,$ $V_o = 0V$	25°C	-20	-30		mA
			Full range	-10			
		$V_{CC} = 15V$ $V_{ID} = -1V,$ $V_o = 15V$	25°C	10	20		
			Full range	5			
		$V_{ID} = -1V,$ $V_o = 200mV$	25°C	12	30		μA
I_{OS}	Short-circuit output current	V_{CC} at 5V, GND at -5V, $V_o = 0V$	25°C		± 40	± 60	mA
I_{CC}	Supply current (two amplifiers)	$V_o = 2.5V,$ No load	Full range		0.5	1.2	mA
		$V_{CC} = MAX,$ $V_o = 0.5V_{CC},$ No load	Full range		1	2	

*All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{CC} for testing Purposes is 30V. Full range is -40°C to 85°C

Typical Performance Characteristics ($T_A=25^\circ\text{C}$, unless otherwise specified.)

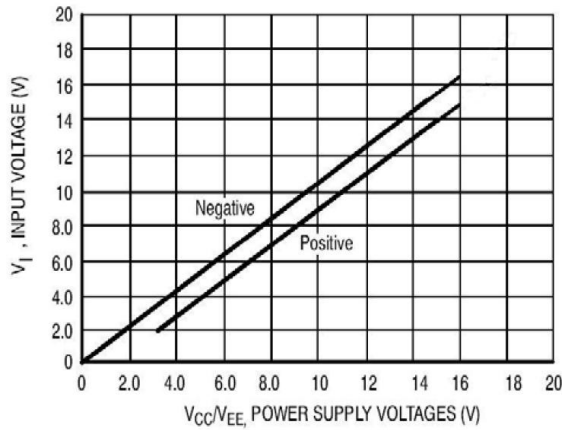


Fig 1. Input Voltage Range

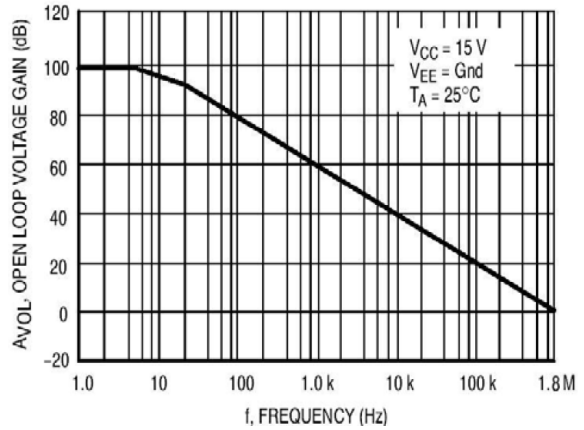


Fig 2. Open Loop Frequency Response

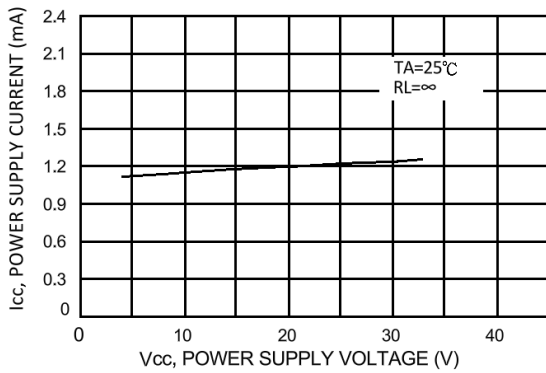


Fig 3. Power Supply Current vs. Power Supply Voltage

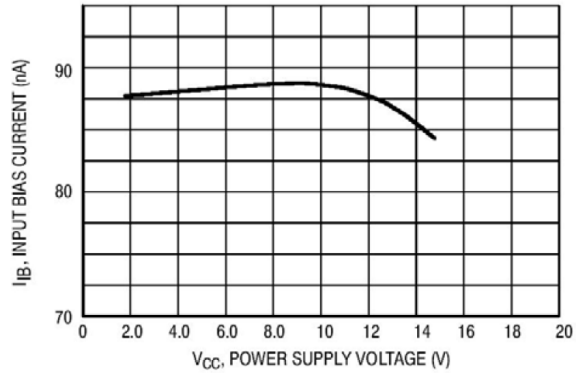


Fig 4. Input Bias Current vs. Supply Voltage

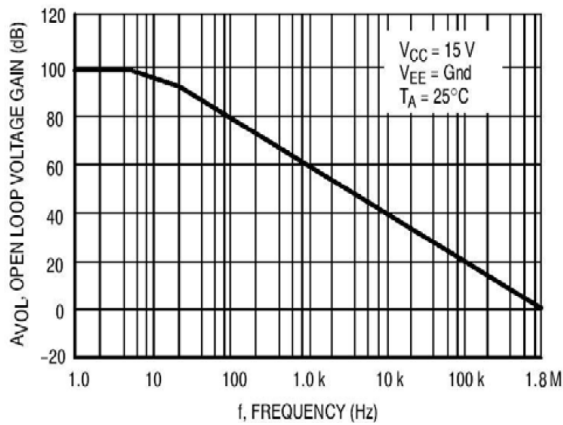


Fig 5. Large-Signal Open Loop Voltage Gain

Typical Performance Characteristics (Continue)

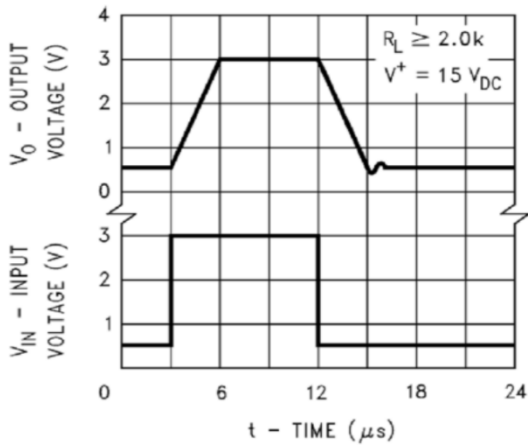


Fig 6 Voltage Follower Pulse Response

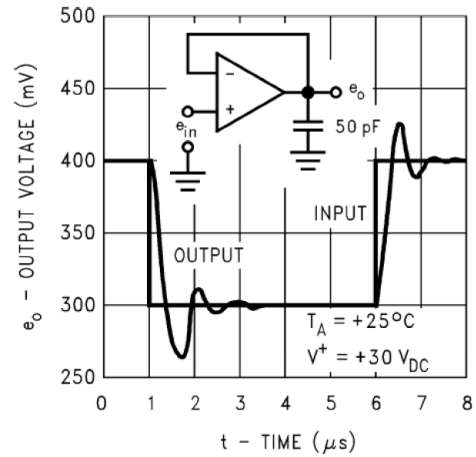


Fig 7. Voltage Follower Pulse Response (Small Signal)

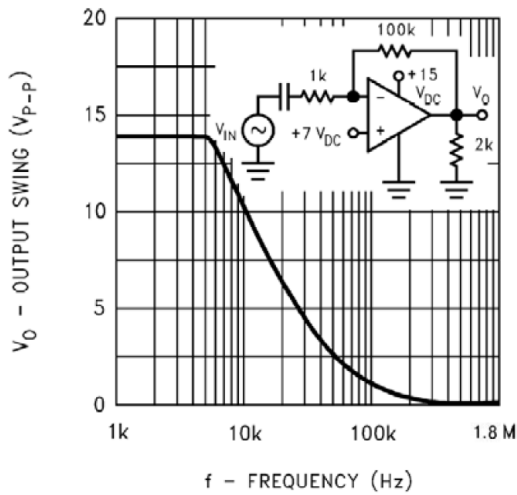


Fig 8. Large Signal Frequency Response

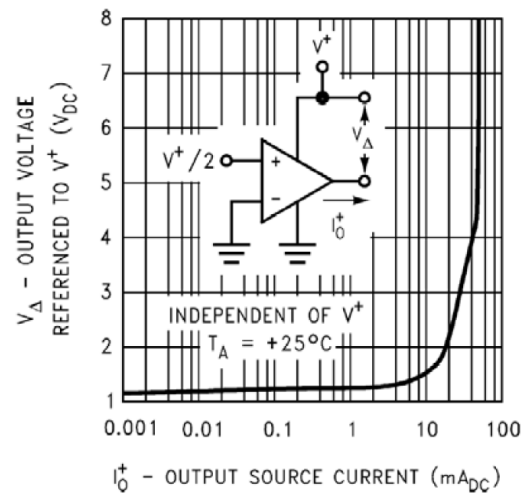


Fig 9. Output Characteristics Current Sourcing

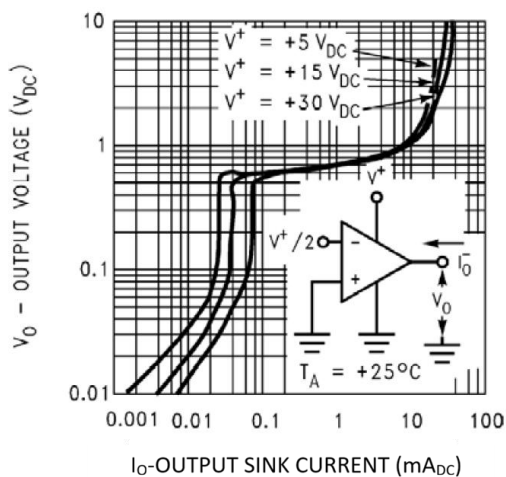


Fig 10. Output Characteristics Current Sinking


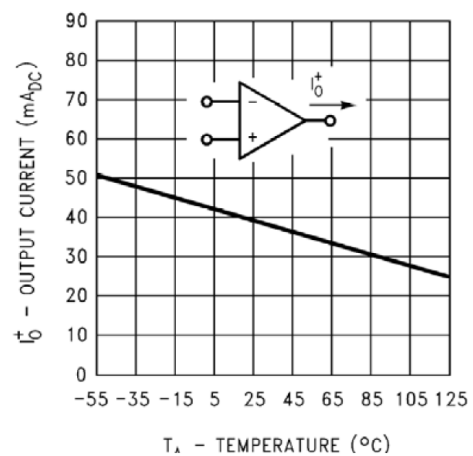



Fig 11. Current Limiting

SOP-8L

Package Dimension

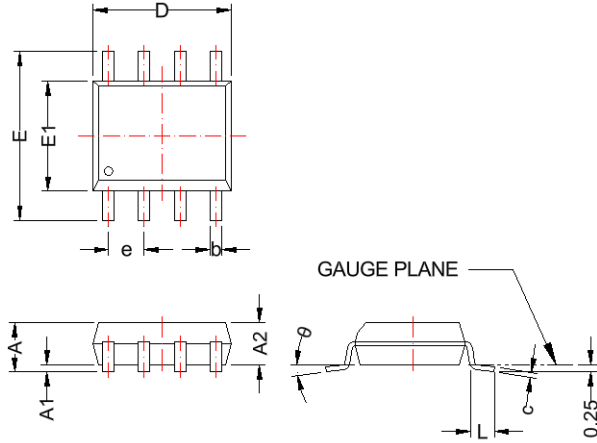

Recommended Land Pattern

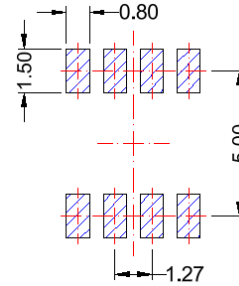

Unit:mm

Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	---	1.75	---	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	---	0.049	---
b	0.31	0.51	0.012	0.020
c	0.10	0.25	0.004	0.010
D	4.70	5.10	0.185	0.201
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
L	0.40	1.27	0.016	0.050
θ	0°	8°	0°	8°





Note:



Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

NOTICE

- Globaltech Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Globaltech Semiconductor products described or contained herein. Globaltech Semiconductor products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Globaltech Semiconductor makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F, NO.43-1, Lane 11, Sec. 6, Minquan E. Rd Neihu District, Taipei City 114761, Taiwan (R.O.C).
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587