

# GS74LVC1G08 Series

## Single 2-Input AND Gate

### Product Description

The GS74LVC1G08 is designed for 1.65V to 5.5V  $V_{CC}$  operation, performs the Boolean function  $Y=A \cdot B$ .

Inputs can be driven from either 3.3V or 5V devices. This feature allows the use of this device in a mixed 3.3V and 5V system environment.



Schmitt trigger action at all inputs makes the circuit tolerant for slower input rise and fall time.

This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing damaging backflow current through the device when it is powered down.

### Features

- Supports 1.65V to 5.5V  $V_{CC}$  operation
- $\pm 24\text{mA}$  output drive at  $V_{CC}=3.0\text{V}$
- CMOS low power consumption
- Direct interface with TTL levels
- Input accepts voltages up to 5V
- Latch-up performance exceeds 100mA
- RoHS Compliant and Halogen Free

### Package & Pin Assignment

| SOT-23-5L   |          |     | SOT-353  |  |  |
|---|----------|-----|--|--|--|
|  |          |     |  |  |  |
| Pin   | Pin Name | I/O | Description  |  |  |
| 1   | B        | I   | Data input   |  |  |
| 2   | A        | I   | Data input   |  |  |
| 3   | GND      | --  | Ground (0V)  |  |  |
| 4   | Y        | O   | Data output  |  |  |
| 5   | Vcc      | --  | Supply voltage   |  |  |

## Functional Block Diagram & Description

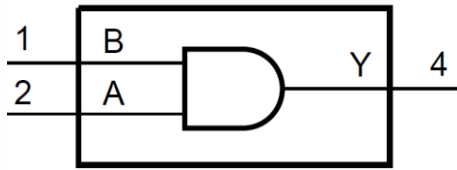


Fig 1. Function Diagram

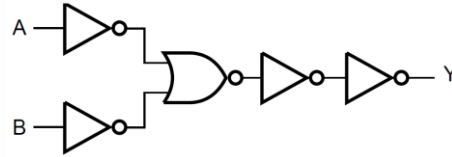



Fig 2. Logic Diagram

| Input A | Input B | Output Y |
|---------|---------|----------|
| L       | L       | L        |
| L       | H       | L        |
| H       | L       | L        |
| H       | H       | H        |

H = HIGH voltage level;  
L = LOW voltage level.

## Ordering and Marking Information

| Ordering Information   |           |              |                 |
|--|-----------|--------------|-----------------|
| Part Number  | Package   | Part Marking | Quantity / Reel |
| GS74LVC1G08LF  | SOT-23-5L | G08□□        | 3,000 PCS       |
| GS74LVC1G08JCF   | SOT-353   | G08□□        | 3,000 PCS       |
| <b>GS74LVC1G08</b> □ <sup>1</sup> □ <sup>2</sup>   |           |              |                 |
| <ul style="list-style-type: none"> <li>- <b>Product</b><br/>GS74LVC1G08</li> <li>- <b>Package Code:</b><br/>□<sup>1</sup> is L or JC<br/>L is SOT-23-5L<br/>JC is SOT-353</li> <li>- <b>Green Level:</b><br/>□<sup>2</sup> is F for RoHS Compliant and Halogen Free</li> </ul> |           |              |                 |
| Marking Information  |           |              |                 |
|   |           |              |                 |
| <ul style="list-style-type: none"> <li>- <b>Product Code:</b><br/>G08</li> <li>- <b>GS Code:</b><br/>□□</li> </ul>   |           |              |                 |

## Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise specified)

| Characteristics                           | Symbol            | Conditions  | Min. | Max.                 | Unit  |
|---|-------------------|---|------|----------------------|-------|
| Supply voltage                            | V <sub>CC</sub>   | --  | -0.5 | +6.5                 | V     |
| Input voltage                             | V <sub>I</sub>    | [1]   | -0.5 | +6.5                 | V     |
| Input clamping current                    | I <sub>IK</sub>   | V <sub>I</sub> <0V                                    | -50  | --                   | mA    |
| Output clamping current                   | I <sub>OK</sub>   | V <sub>O</sub> <0V or V <sub>O</sub> >V <sub>CC</sub> | -50  | +50                  | mA    |
| Output voltage                            | V <sub>O</sub>    | Active mode [1]                                       | -0.5 | V <sub>CC</sub> +0.5 | V     |
|   |                   | Power-down mode [1]                                   | -0.5 | +6.5                 | V     |
| Output current                            | I <sub>O</sub>    | V <sub>O</sub> =0V to V <sub>CC</sub>                 | -50  | +50                  | mA    |
| Supply current                            | I <sub>CC</sub>   | --  | --   | +100                 | mA    |
| Ground current                            | I <sub>GND</sub>  | --  | -100 | --                   | mA    |
| Storage temperature                       | T <sub>stg</sub>  | --  | -65  | +150                 | °C    |
| Thermal Resistance<br>Junction to Ambient | R <sub>thJA</sub> | SOT-23-5L   | 229  |                      | °C /W |
|   |                   | SOT-353   | 278  |                      |       |
| Latch up                                  | LU                | T <sub>A</sub> =25°C, 125°C                           | 100  | --                   | mA    |

### NOTE

1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

## Recommended Operating Condition (T<sub>A</sub>=25°C unless otherwise specified)

(Voltages are referenced to GND (ground=0V))

| Characteristics                        | Symbol          | Conditions                     | Min. | Typ. | Max.            | Unit |
|--|-----------------|--------------------------------|------|------|-----------------|------|
| Supply Voltage                         | V <sub>CC</sub> | --                             | 1.65 | --   | 5.5             | V    |
| Input Voltage                          | V <sub>I</sub>  | --                             | 0    | --   | 5.5             | V    |
| Output Voltage                         | V <sub>O</sub>  | --                             | 0    | --   | V <sub>CC</sub> | V    |
| Ambient Temperature                    | T <sub>A</sub>  |                                | -40  | +25  | +125            | °C   |
| Input Transition<br>rise and fall rate | Δt/ΔV           | V <sub>CC</sub> =1.65V to 2.7V | --   | --   | 20              | ns/V |
|  |                 | V <sub>CC</sub> =2.7V to 5.5V  | --   | --   | 10              | ns/V |

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise specified)

### ■ Static Characteristics

(Voltages are referenced to GND (ground=0V))

| Characteristics           | Symbol           | Test condition  | -40°C to 85°C        |                     |                      | -40°C to +125°C      |                      | Unit |
|---------------------------|------------------|---|----------------------|---------------------|----------------------|----------------------|----------------------|------|
|                           |                  |   | Min.                 | Typ. <sup>[1]</sup> | Max.                 | Min.                 | Max.                 |      |
| High-level input voltage  | V <sub>IH</sub>  | V <sub>CC</sub> =1.65V to 1.95V   | 0.65 V <sub>CC</sub> | --                  | --                   | 0.65 V <sub>CC</sub> | --                   | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V   | 1.7                  | --                  | --                   | 1.7                  | --                   | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V   | 2.0                  | --                  | --                   | 2.0                  | --                   | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V   | 0.7V <sub>CC</sub>   | --                  | --                   | 0.7 V <sub>CC</sub>  | --                   | V    |
| Low-level input voltage   | V <sub>IL</sub>  | V <sub>CC</sub> =1.65V to 1.95V   | --                   | --                  | 0.35 V <sub>CC</sub> | --                   | 0.35 V <sub>CC</sub> | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V   | --                   | --                  | 0.7                  | --                   | 0.7                  | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V   | --                   | --                  | 0.8                  | --                   | 0.8                  | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V   | --                   | --                  | 0.3 V <sub>CC</sub>  | --                   | 0.3 V <sub>CC</sub>  | V    |
| High-level output voltage | V <sub>OH</sub>  | V <sub>I</sub> =V <sub>IH</sub> or V <sub>IL</sub>  |                      |                     |                      |                      |                      |      |
|                           |                  | I <sub>O</sub> =-100μA; V <sub>CC</sub> =1.65V to 5.5V  | V <sub>CC</sub> -0.1 | --                  | --                   | V <sub>CC</sub> -0.1 | --                   | V    |
|                           |                  | I <sub>O</sub> =-4mA; V <sub>CC</sub> =1.65V  | 1.2                  | --                  | --                   | 0.95                 | --                   | V    |
|                           |                  | I <sub>O</sub> =-8mA; V <sub>CC</sub> =2.3V   | 1.9                  | --                  | --                   | 1.7                  | --                   | V    |
|                           |                  | I <sub>O</sub> =-12mA; V <sub>CC</sub> =2.7V  | 2.2                  | --                  | --                   | 1.9                  | --                   | V    |
|                           |                  | I <sub>O</sub> =-24mA; V <sub>CC</sub> =3.0V  | 2.3                  | --                  | --                   | 2.0                  | --                   | V    |
|                           |                  | I <sub>O</sub> =-32mA; V <sub>CC</sub> =4.5V  | 3.8                  | --                  | --                   | 3.4                  | --                   | V    |
| Low-level output voltage  | V <sub>OL</sub>  | V <sub>I</sub> =V <sub>IH</sub> or V <sub>IL</sub>  |                      |                     |                      |                      |                      |      |
|                           |                  | I <sub>O</sub> =100μA; V <sub>CC</sub> =1.65V to 5.5V   | --                   | --                  | 0.1                  | --                   | 0.1                  | V    |
|                           |                  | I <sub>O</sub> =4mA; V <sub>CC</sub> =1.65V   | --                   | --                  | 0.45                 | --                   | 0.7                  | V    |
|                           |                  | I <sub>O</sub> =8mA; V <sub>CC</sub> =2.3V  | --                   | --                  | 0.30                 | --                   | 0.45                 | V    |
|                           |                  | I <sub>O</sub> =12mA; V <sub>CC</sub> =2.7V   | --                   | --                  | 0.40                 | --                   | 0.60                 | V    |
|                           |                  | I <sub>O</sub> =24mA; V <sub>CC</sub> =3.0V   | --                   | --                  | 0.55                 | --                   | 0.80                 | V    |
|                           |                  | I <sub>O</sub> =32mA; V <sub>CC</sub> =4.5V   | --                   | --                  | 0.55                 | --                   | 0.80                 | V    |
| Input leakage current     | I <sub>I</sub>   | V <sub>I</sub> =5.5V or GND ; V <sub>CC</sub> =0V to 5.5V   | --                   | ±0.1                | ±1.0                 | --                   | ±1.0                 | μA   |
| Power-off leakage current | I <sub>OFF</sub> | V <sub>CC</sub> =0V; V <sub>I</sub> or V <sub>O</sub> =5.5V   | --                   | ±0.1                | ±2.0                 | --                   | ±2.0                 | μA   |
| Supply current            | I <sub>CC</sub>  | V <sub>I</sub> =5.5V or GND; I <sub>O</sub> =0A ; V <sub>CC</sub> =1.65V to 5.5V                          | --                   | 0.1                 | 4.0                  | --                   | 4.0                  | μA   |
| Additional supply current | ΔI <sub>CC</sub> | V <sub>CC</sub> =2.3 V to 5.5V V <sub>I</sub> =V <sub>CC</sub> -0.6V; I <sub>O</sub> =0A ; Per input pin; | --                   | 5                   | 500                  | --                   | 500                  | μA   |
| Input capacitance         | C <sub>I</sub>   | --  | --                   | 5                   | --                   | --                   | --                   | pF   |

#### NOTE

1. Typical values are measured at V<sub>CC</sub>=3.3V and T<sub>A</sub>=25°C.

## ■ Dynamic Characteristics


(GND=0V. for test circuit see Fig.4)

| Characteristics   | Symbol   | Test condition                      | -40°C to 85°C |                     |      | -40°C to +125°C |      | Unit |
|-------------------|----------|-------------------------------------|---------------|---------------------|------|-----------------|------|------|
|                   |          |                                     | Min.          | Typ. <sup>[1]</sup> | Max. | Min.            | Max. |      |
| Propagation delay | $t_{pd}$ | A, B to Y; see Fig.3 <sup>[2]</sup> |               |                     |      |                 |      |      |
|                   |          | $V_{CC}=1.65V$ to $1.95V$           | 1.0           | 5.2                 | 10.8 | 1.0             | 13.2 | ns   |
|                   |          | $V_{CC}=2.3V$ to $2.7V$             | 0.5           | 3.0                 | 7.5  | 0.5             | 9.0  | ns   |
|                   |          | $V_{CC}=2.7V$                       | 0.5           | 3.5                 | 8.4  | 0.5             | 9.8  | ns   |
|                   |          | $V_{CC}=3.0V$ to $3.6V$             | 0.5           | 2.6                 | 6.2  | 0.5             | 7.5  | ns   |
|                   |          | $V_{CC}=4.5V$ to $5.5V$             | 0.5           | 2.2                 | 5.4  | 0.5             | 6.3  | ns   |

### NOTE

1. Typical values are measured at  $V_{CC}=3.3V$  and  $T_A=25^\circ C$ .
2.  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

## Waveforms and Test Circuit


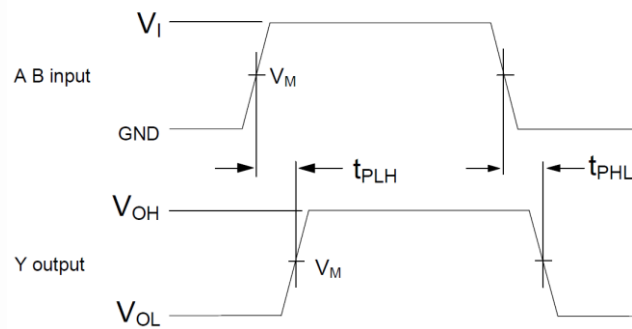


$V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

Fig 3. Propagation delay input (A, B) to output (Y)

## ■ Measurement Points

| Supply voltage | Input       | Output      |
|----------------|-------------|-------------|
|                | $V_M$       | $V_M$       |
| 1.65V to 1.95V | $0.5V_{CC}$ | $0.5V_{CC}$ |
| 2.3V to 2.7V   | $0.5V_{CC}$ | $0.5V_{CC}$ |
| 2.7V           | 1.5V        | 1.5V        |
| 3.0V to 3.6V   | 1.5V        | 1.5V        |
| 4.5V to 5.5V   | $0.5V_{CC}$ | $0.5V_{CC}$ |

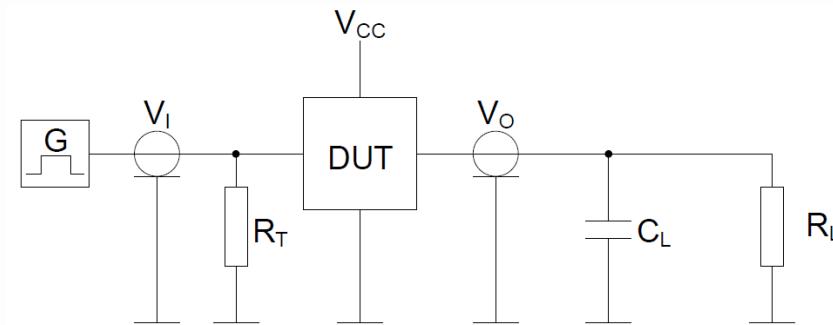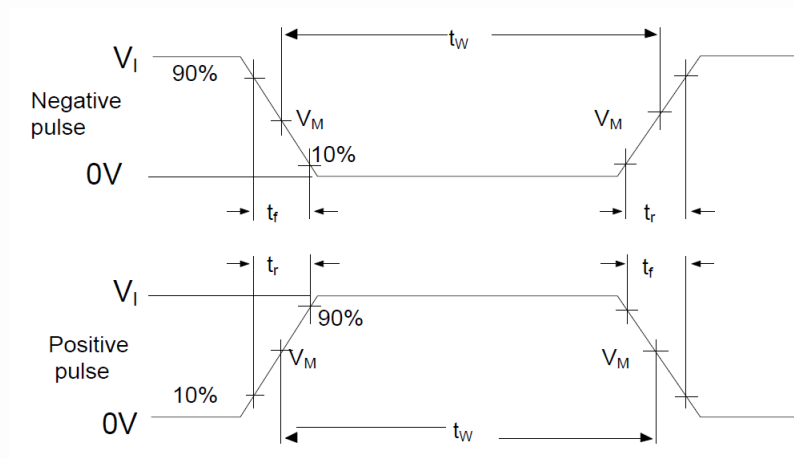

**Fig 4. Test circuit for measuring switching times**

Definitions test circuit :

$R_T$ = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator

$C_L$ = Load capacitance including jig and probe capacitance


$R_L$ = Load resistor

■ **Test Data**


| Supply voltage | Input |                     | Load  |              |
|----------------|-------|---------------------|-------|--------------|
|                | $V_I$ | $t_r, t_f$          | $C_L$ | $R_L$        |
| 1.65V to 1.95V | VCC   | $\leq 3.0\text{ns}$ | 30pF  | 1k $\Omega$  |
| 2.3V to 2.7V   | VCC   | $\leq 3.0\text{ns}$ | 30pF  | 500 $\Omega$ |
| 2.7V           | 2.7V  | $\leq 3.0\text{ns}$ | 50pF  | 500 $\Omega$ |
| 3.0V to 3.6V   | 2.7V  | $\leq 3.0\text{ns}$ | 50pF  | 500 $\Omega$ |
| 4.5V to 5.5V   | VCC   | $\leq 3.0\text{ns}$ | 50pF  | 500 $\Omega$ |

# SOT-23-5L

## Package Dimension

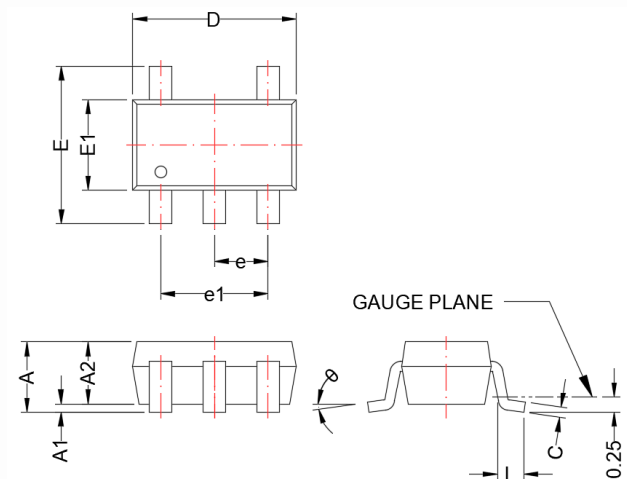

## Recommended Land Pattern




| Dimensions |             |      |           |       |
|------------|-------------|------|-----------|-------|
| Symbol     | Millimeters |      | Inches    |       |
|            | Min         | Max  | Min       | Max   |
| A          | 0.90        | 1.45 | 0.035     | 0.057 |
| A1         | 0.00        | 0.15 | 0.000     | 0.006 |
| A2         | 0.90        | 1.30 | 0.035     | 0.051 |
| b          | 0.30        | 0.50 | 0.012     | 0.020 |
| c          | 0.08        | 0.26 | 0.003     | 0.010 |
| D          | 2.70        | 3.10 | 0.106     | 0.122 |
| E          | 2.20        | 3.00 | 0.087     | 0.118 |
| E1         | 1.30        | 1.75 | 0.051     | 0.069 |
| e          | 0.95 BSC    |      | 0.037 BSC |       |
| e1         | 1.90 BSC    |      | 0.075 BSC |       |
| L          | 0.30        | 0.60 | 0.012     | 0.024 |
| $\theta$   | 0°          | 8°   | 0°        | 8°    |


**NOTE:**  
Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

# SOT-353

## Package Dimension

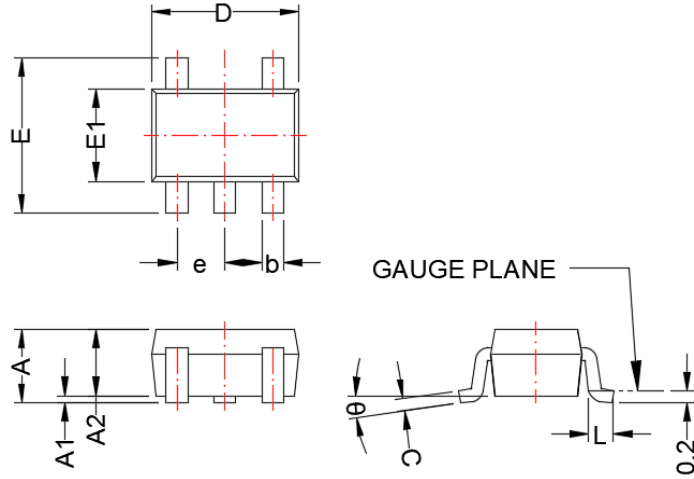

## Recommended Land Pattern

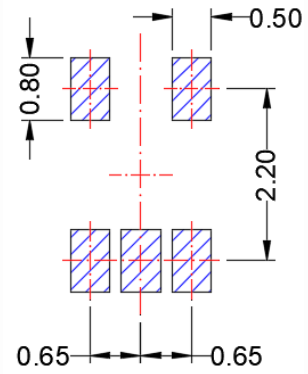

| Dimensions |             |      |           |       |
|------------|-------------|------|-----------|-------|
| Symbol     | Millimeters |      | Inches    |       |
|            | Min         | Max  | Min       | Max   |
| A          | ---         | 1.10 | ---       | 0.043 |
| A1         | 0.00        | 0.10 | 0.000     | 0.004 |
| A2         | 0.70        | 1.00 | 0.028     | 0.039 |
| b          | 0.15        | 0.35 | 0.006     | 0.014 |
| c          | 0.08        | 0.25 | 0.003     | 0.010 |
| D          | 1.80        | 2.20 | 0.071     | 0.087 |
| E          | 1.80        | 2.45 | 0.071     | 0.096 |
| E1         | 1.15        | 1.35 | 0.045     | 0.053 |
| e          | 0.65 BSC    |      | 0.026 BSC |       |
| L          | 0.26        | 0.46 | 0.010     | 0.018 |
| $\theta$   | 0°          | 8°   | 0°        | 8°    |





**NOTE:**



Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

## NOTICE

- Globaltech Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Globaltech Semiconductor products described or contained herein. Globaltech Semiconductor products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Globaltech Semiconductor makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

## CONTACT US

| GS Headquarter  |  |
|---|--|
|  | 4F, NO.43-1, Lane 11, Sec. 6, Minquan E. Rd Neihu District, Taipei City 114761, Taiwan(R.O.C). |
|  | 886-2-2657-9980  |
|  | 886-2-2657-3630  |
|  | <a href="mailto:sales_twn@gs-power.com">sales_twn@gs-power.com</a>                             |

| RD Division   |                                      |
|---|--------------------------------------|
|  | 824 Bolton Drive Milpitas. CA. 95035 |
|  | 1-408-457-0587                       |